



Telescopic conveyors are extendible conveyors that help to reach inside the vehicles such as trailers, trucks, containers, and vans to load or unload bulk products in safe, quick and affordable way. Telescopic conveyors, provide a significant improvement in loading/unloading time in warehouses.

Conveline telescopic conveyors provide the highest level of productivity for large volume, shipping and receiving application for any type of distribution center. Automate your loading and unloading areas and convey a variety of products from the large or small cartons to loose bags and tires.



## TELESCOPIC CONVEYOR

**Save time—unload & load parcels, polybags & even tyres swiftly and ergonomically using Telescopic Conveyors**

All of our telescopic conveyors feature a VFD controlled belt drive system providing smooth transitions from belt starts and stops at speeds up to 36 MPM. With a variety of length, widths, options and accessories. Telescopic conveyors will help achieve all of your material handling goals.

### DETAILS

**WIDTH: 23" (600mm) / 31" (800mm)**

Width is determined by package size, available conveying area and application specific needs.

**LENGTH EXTENDED: 20ft — 40ft**

Length is determined by specific application needs.

**Stability | Capability | Adaptability | Durability | Reliability | Availability**

SPECIFICATIONS

Model	Base Length (mm)	Extended length (mm)	Total Length (mm)	Height (mm)	Belt Width (B)
6001-4S-4/7	4000	7000	11000	950	600/800
6001-4S-5/10	5000	10000	15000	950	600/800
6001-4S-6/12	6000	12000	18000	950	600/800
6001-5S-7/18	7000	18000	25000	1100	600/800

ACCESSORIES

- Man-rider platform
- Inclined belt transfer
- Direct or pole mounted fan
- Swivel boom
- Hydraulic tilt
- Auto-loader

TECHNICAL DATA

CONSTRUCTION


All Steel Construction.

WARRANTY

ELECTRICAL: 12 Months  
MECHANICAL: 24 Months

SERVICES AVAILABLE

Technical Support • Installation & Service  
Preventive & Routine Maintenance • Application Support  
Operator & Maintenance Training

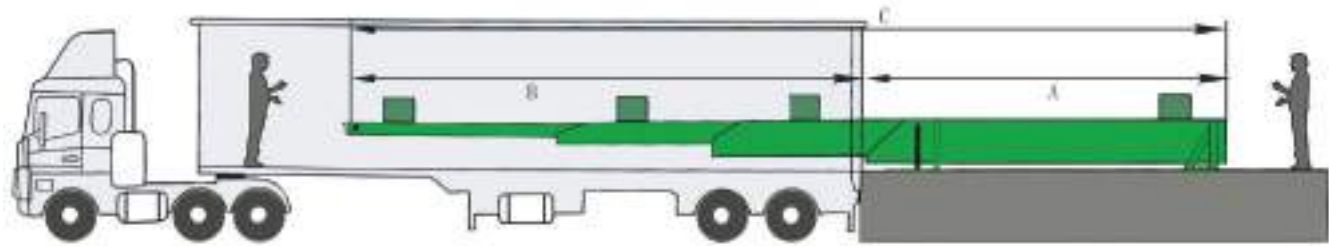

All conveyor products can be modified to suit specific design requirements. Please contact our sales representatives for details on sizes or options that are not listed.

STANDARD FEATURES

- Load capacity 80 Kg/meter
- Maximum live load at any given time: 1500 Kg.
- 2-Ply PVC / PVK material Belt
- 3HP belt drive motor
- 18 MPM – 36 MPM belt speeds
- 10 MPM extension speed
- 1HP gear motor for extension with friction clutch
- Operator controls – In/Out, Start/Stop, E-stop, Lights
- Belt & E-stop status & interlocks
- Emergency stops at control panels
- UHMW stage gap filler
- Extension stop bar on final stage
- Audible alarm

OPTIONS

- Variable belt speeds available with VFD controls
- Photo eye flow control
- Indexing
- Localized electrical system design with any standard voltage
- Transition rollers at site end of the conveyor



Gravity Roller Telescopic Conveyor



Handling Platform for loading and unloading stand



CONVELINE SYSTEMS PRIVATE LIMITED

BLOCK NO.472, Tajpur Road,  
B/h Unick Fix A Form, Changodar,  
Ahmedabad-382213, Gujarat, India

+91 908 1915 912  
info@conveline.com, sales@conveline.com  
www.conveline.com, www.convelinerollers.com

© Conveline Systems Pvt. Ltd. 2021. All Rights Reserved. MADE IN INDIA.